
Hydraulic fluid power — Flange connections with split or one-piece flange clamps and metric or inch screws —

Part 2:
Flange connectors, ports and mounting surfaces for use at a pressure of 42 MPa (420 bar), DN 13 to DN 76

Transmissions hydrauliques — Raccordements à bride avec demi-bridés ou bride monobloc et vis métriques ou en inches —

Partie 2: Brides, orifices et surfaces de montage pour utilisation à une pression de 42 MPa (420 bar), de DN 13 à DN 76





COPYRIGHT PROTECTED DOCUMENT

© ISO 2018

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Fax: +41 22 749 09 47
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Licensed to: Hade, Allison
Downloaded: 2023-01-25
Single user licence only, copying and networking prohibited

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Material	2
5 Selection	3
6 Dimensions and tolerances	4
7 Corrosion protection	4
8 Pressure/temperature requirements	5
9 Marking	5
10 Designation of flange connections and their parts	6
Annex A (informative) Recommended assembly procedures and screw torque levels for flange connections conforming to ISO 6162-2	18
Annex B (informative) O-ring designation codes and dimensions	20
Bibliography	21

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is ISO/ TC 131, *Fluid power systems*, Subcommittee SC 4, *Connectors and similar products and components*.

This third edition cancels and replaces the second edition (ISO 6162-2:2012), which has been technically revised. In this edition, a new part number designation is used, the position of the identification groove is corrected, and other minor changes were made for clarification.

A list of all the parts in the ISO 6162 series can be found on the ISO website.

Changes to this addition include the following:

- restructuring the wording to follow new rules;
- changing [Clause 10](#) Designation of flange connections and their parts to conform to the ISO/IEC Directives, Part 2;
- moving the identification groove on the flange head to reflect the correct position;
- changing the drawings to improve clarity;
- adding chamfers to the top of the O-ring groove and clarifying other chamfer notes;
- adding a perpendicular requirement to the tapped holes on the port.

Introduction

In hydraulic fluid power systems, power is transmitted and controlled through a liquid under pressure within an enclosed circuit. Components are interconnected through their ports and associated fluid conductor connector ends.

Hydraulic fluid power — Flange connections with split or one-piece flange clamps and metric or inch screws —

Part 2:

Flange connectors, ports and mounting surfaces for use at a pressure of 42 MPa (420 bar), DN 13 to DN 76

WARNING — Users of this document should ensure that suitable material is chosen for the port to maintain the required working pressure, if carbon steel is not used. In addition, flanged head material and wall thickness depend on the selected working pressure and the d_8 diameter.

1 Scope

This document gives general and dimensional specifications for flanged heads, split flange clamps (FCS and FCSM), one-piece flange clamps (FC and FCM), ports and mounting surfaces applicable to four-screw, split and one-piece flange clamp type tube connectors and hose fittings for use at a pressure of 42 MPa (420 bar¹). It also specifies the dimensions of the seals to be used, as well as the grooves that house the seals.

This document also recognizes the need to accommodate metric screw fasteners (type 1) (for DN 13 to DN 76), as well as to provide a means to use existing inch screw fasteners (type 2) (for DN 13 to DN 51).

These connections are intended for application in hydraulic systems on industrial and commercial products where it is desired to avoid the use of threaded connectors.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 48, *Rubber, vulcanized or thermoplastic — Determination of hardness (hardness between 10 IRHD and 100 IRHD)*

ISO 261, *ISO general purpose metric screw threads — General plan*

ISO 263, *ISO inch screw threads — General plan and selection for screws, bolts and nuts — Diameter range 0,06 to 6 in*

ISO 724, *ISO general-purpose metric screw threads — Basic dimensions*

ISO 725, *ISO inch screw threads — Basic dimensions*

ISO 898-1, *Mechanical properties of fasteners made of carbon steel and alloy steel — Part 1: Bolts, screws and studs with specified property classes — Coarse thread and fine pitch thread*

ISO 1302, *Geometrical Product Specifications (GPS) — Indication of surface texture in technical product documentation*

ISO 2768-1, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*

1) 1 bar = 0,1 MPa = 10⁵ Pa, 1 Pa = 1 N/m².

ISO 3601-1, *Fluid power systems — O-rings — Part 1: Inside diameters, cross-sections, tolerances and designation codes*

ISO 3601-3, *Fluid power systems — O-rings — Part 3: Quality acceptance criteria*

ISO 4017, *Fasteners — Hexagon head screws — Product grades A and B*

ISO 4762, *Hexagon socket head cap screws*

ISO 5598, *Fluid power systems and components — Vocabulary*

ISO 7089, *Plain washers — Normal series — Product grade A*

ISO 9227, *Corrosion tests in artificial atmospheres — Salt spray tests*

ISO 19879, *Metallic tube connections for fluid power and general use — Test methods for hydraulic fluid power connections*

ANSI/ASME B18.3, *Socket Cap, Shoulder, and Set Screws, Hex and Spline Keys (Inch Series)*

ASTM A574, *Standard Specification for Alloy Steel Socket Head Cap Screws*

SAE J429, *Mechanical and Material Requirements for Externally Threaded Fasteners*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5598 apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp/3.1>

4 Material

4.1 Split flange clamps (see [Figure 3](#)) and one-piece flange clamps (see [Figure 4](#)) shall be ferrous material with the following properties in the finished condition:

- minimum yield strength: 330 MPa;
- minimum elongation at fracture: 3 %.

4.2 Flanged heads shall be ferrous material with the following properties in the finished condition:

- minimum yield strength: 215 MPa;
- minimum elongation at fracture: 10 %.

4.3 Unless otherwise specified, one of the following screw options shall be used:

- a) hexagon head screws conforming to ISO 4017 of property class 10.9 (minimum) in accordance with ISO 898-1, or
- b) socket head screws conforming to ISO 4762 of property class 10.9 (minimum) in accordance with ISO 898-1, or
- c) inch hexagon head screws conforming to SAE J429 of grade 8 (minimum), or
- d) inch socket head screws conforming to the product specifications of ANSI/ASME B18.3 and made of material conforming to ASTM A574

ASTM A574, *Standard Specification for Alloy Steel Socket Head Cap Screws*, Allison
Downloaded: 2023-01-25

Single user licence only, copying and networking prohibited

4.4 Unless otherwise specified, the O-rings shall be made of NBR (nitrile) with a hardness of (90 ± 5) IRHD, measured in accordance with ISO 48, for use at the pressure and temperature requirements given in [Clause 8](#) and [Table 1](#) or [Table 2](#), and for testing. The O-rings specified in [Tables 1](#) and [2](#) shall conform to the dimensions given in ISO 3601-1 for the relevant size code, conform to tolerance class A in ISO 3601-1 and shall meet or exceed the O-ring quality acceptance criteria for grade N of ISO 3601-3. If the flange connection is expected to be used at temperatures higher than specified in [Clause 8](#), O-rings made of materials that meet the higher temperature requirements shall be used.

4.5 Connectors conforming to this document contain elastomeric seals. Unless otherwise specified, connectors are made and delivered with elastomeric seals for use within the specified working temperature range with petroleum base hydraulic fluids. The use of these connectors and elastomeric seals with other hydraulic fluids might result in a reduced working temperature range or might render the connectors unsuitable for the application. Upon request, manufacturers may supply connectors with elastomeric seals which are intended for use with non-petroleum base hydraulic fluid and which meet the specified working temperature range of the connectors.

4.6 The surface pressure between the screw head and the flange clamp should be considered. The use of hardened washers is recommended; however, flange connections conforming to previous editions of ISO 6162-2 might not accommodate the use of this type of washer. Washers, if used, shall conform to ISO 7089 (HV 300) type A and be sized for the corresponding screw. Plain washers conforming to ANSI/ASME B18.22.1, type B narrow series HV 300, may be substituted when using type 2 screws; see [Tables 1](#) and [2](#) for exceptions.

5 Selection

5.1 Ensure that the flange connection needs to conform to ISO 6162-2, taking into account the maximum working pressure and the dimensional differences between ISO 6162-1 and ISO 6162-2. Parts shall not be interchanged between flange connections that conform to ISO 6162-1 and 6162-2.

NOTE See [9.1 b\)](#) for the method of identifying flanged heads that conform to this document.

5.2 For new design, select the flange connector size by the nominal flange size that corresponds to the maximum diameter of the bore through the flanged head (dimension d_2) or the flange pad (dimension d_1).

5.3 Match the nominal flange sizes for the clamp, port, and flanged head.

5.4 Select either type 1 (for use with either metric or inch screws) or type 2 (for use with inch screws only), split (FCS or FCSM) or one-piece (FC or FCM) flange clamps and ports, depending on whether metric or inch screw fasteners are required. Type 2 (inch) flange ports and assemblies shall not be used for new designs in hydraulic fluid power.

NOTE The selection of the flanged head and O-ring is not affected by the difference in metric or inch screw fasteners.

5.5 Select screws, O-rings, and washer sizes corresponding to the nominal flange size and from the tables corresponding to type 1 ([Table 1](#)) or type 2 ([Table 2](#)).

5.6 To match an existing pad, measure the bolt pattern dimensions L_7 and L_{10} (see [Figure 6](#)), and determine screw type to select the proper flanged head and clamp. To avoid interchange between flange connections conforming to ISO 6162-1 and ISO 6162-2, the pattern should be measured with an accuracy of 1 mm or less.

5.7 To match an existing flanged head, measure the diameter d_{10} and thickness L_{14} (see [Figure 5](#)) with an accuracy of 0,5 mm or less.

5.8 Select between a one-piece flange clamp (FC or FCM) or a split flange clamp (FCS or FCSM).

6 Dimensions and tolerances

6.1 Dimensions of type 1 flange assemblies, including screws, shall be in accordance with [Figure 1](#) (for split flange clamp) or [Figure 2](#) (for one-piece clamp) and [Table 1](#). Dimensions of type 2 flange assemblies, including screws, shall be in accordance with [Figure 1](#) (for split flange clamp) or [Figure 2](#) (for one-piece clamp) and [Table 2](#).

6.2 Dimensions of split flange clamps shall be in accordance with [Figure 3](#) and [Table 3](#). Dimensions of one-piece flange clamps shall be in accordance with [Figure 4](#) and [Table 3](#). A maximum draft angle of 6° from surface B as shown in [Figure 3](#) or [Figure 4](#) or from the middle of the side each way is allowed.

6.3 Dimensions of flanged heads shall be in accordance with [Figure 5](#) and [Table 4](#).

6.4 Dimensions of ports for flange connections and flange pad widths shall be in accordance with [Figure 6](#) and [Table 5](#).

6.5 Dimensions of O-rings shall be in accordance with ISO 3601-1; [Tables 1](#) and [2](#) provide the size code in accordance with ISO 3601-1.

6.6 Unless otherwise specified, tolerances shall be in accordance with ISO 2768-1, class designation m (medium).

6.7 Dimensions and tolerances given in the tables apply to the finished parts, plated or otherwise processed, as specified by the purchaser.

7 Corrosion protection

7.1 The external surface of all carbon steel flange clamps and carbon steel flanged heads, except weld-on flanged heads, shall be protected with an appropriate coating to pass a minimum 72-h neutral salt spray test in accordance with ISO 9227, unless otherwise agreed upon by the supplier and purchaser. Weld-on flanged heads shall be protected from corrosion by an oil film, phosphate coating or by other means that do not negatively affect weldability. This protection shall meet or exceed a 16-h neutral salt spray test in accordance with ISO 9227, unless otherwise agreed upon by the supplier and purchaser.

7.2 Screws and washers shall be protected from corrosion by an oil film, phosphate coating, or other means that do not encourage hydrogen embrittlement, to meet or exceed the requirements of a 16-h neutral salt spray test in accordance with ISO 9227.

NOTE The torque values specified in this document were determined using phosphate-coated screws.

7.3 Any appearance of red rust during the above salt spray tests shall be considered a failure, except for the following:

- all internal passages;
- edges such as hex points, serrations and crests of threads where there can be mechanical deformation of the plating or coating typical of mass-produced parts or shipping effects;
- areas where there is mechanical deformation of the plating or coating caused by crimping, flaring, bending and other post-plate metal forming operations;
- areas where the parts are suspended or affixed in the test chamber and condensate can accumulate.

7.4 Parts conforming to this document shall not be cadmium plated. Hexavalent chromate coatings are not preferred for commercial and industrial usage for environmental reasons. Changes in plating can affect assembly torques and require requalification.

7.5 Internal fluid passages shall be protected from corrosion during storage and shipping.

7.6 All connection components shall be free from all hanging burrs, loose scale and slivers that might become dislodged in use, and from all other defects that might affect their serviceability. All machined surfaces shall have a surface roughness value of ISO 1302-MRR Ramax 6,3, except where otherwise specified.

7.7 A smooth sealing surface shall be provided. Annular (circumferential) tool marks up to a surface roughness value of ISO 1302-MRR Ramax 3,2 are acceptable. Scratches with a width greater than 0,13 mm running perpendicular, radial, or spiral to the connector inside diameter on the bottom and outside diameter of the O-ring groove are not acceptable.

7.8 For more specific finish requirements, see [Figures 1](#) to [6](#).

8 Pressure/temperature requirements

8.1 Flange connections conforming to this document shall be subjected to the burst and cyclic endurance tests specified in ISO 19879 to verify that they meet the specified pressure/temperature requirements. Surges of pressure higher than the nominal ratings can reduce the ability of the flange connections to retain the hydraulic fluid. This needs to be taken into account in the design of the hydraulic system.

8.2 Flange connections conforming to this document and made of carbon steel shall be suitable for use at the working pressures given in [Tables 1](#) and [2](#) when used at temperatures between -40 °C and $+120\text{ °C}$. Flange connections conforming to this document shall not be assembled at temperatures lower than -20 °C .

8.3 Flange connections conforming to this document and made of stainless steel shall be suitable for use at the working pressures given in [Tables 1](#) or [2](#) when used at temperatures between -60 °C and $+50\text{ °C}$. Working pressure for connectors made from stainless steel and used at elevated temperatures shall be reduced by 4 % for temperatures from $+50\text{ °C}$ up to 100 °C , by 11 % for temperatures from $+100\text{ °C}$ up to 200 °C , and by 20 % for temperatures from $+200\text{ °C}$ to 250 °C . Flange connections conforming to this document shall not be assembled at temperatures lower than -20 °C .

9 Marking

9.1 The flanged head shall be permanently marked, at the minimum, with the following:

- a) the manufacturer's name or trademark;
- b) an identification groove 1 mm to 1,5 mm wide and 0,5 mm to 0,75 mm deep, of optional shape, located on the circumference of the flange disk starting at a distance ($L_{14} - 3$) mm from the face, i.e. reference datum "B", can be used to identify flanged heads that conform to this document. This groove is optional on flanged heads manufactured before 2019-01-01 and shall be mandatory on and after that date.

NOTE Flanged heads for use at 42 MPa (420 bar) that conform to ISO 6162:1994 or ISO 6162-2:2012 do not have this groove.

9.2 Only size DN 25 type 1 (metric) FCM and FCSM clamps shall be permanently marked with the letter "M" for identification, to denote use of metric screws. Letter height shall be 5 mm minimum. Location of the marking may differ from the location shown in [Figures 3](#) and [4](#). Marking shall be on the topside or

outside of the flange. No identification is required for type 2 (inch) FC and FCS clamps or clamps that are intended to be used with either metric or inch screws.

NOTE This edition of ISO 6162-2 specifies screw hole dimensions that, in most cases, accommodate both metric and inch screws. In previous editions, several clamp sizes could only be used with metric screws and were marked with an "M".

9.3 Ports for type 1 (metric) flange connections shall be permanently marked with the letter "M" for identification. Letter height shall be 3 mm minimum. The "M" shall be imprinted and located on the centreline between holes defined by dimension l_{10} (see [Figure 6](#)) and shall not extend into the O-ring sealing area. No identification is required for ports for type 2 (inch) flange connections.

10 Designation of flange connections and their parts

NOTE Only flange clamps are typically ordered using the given designations; the designations of ports and flanged heads are used only to describe these parts, because they are features of a more complex part (e.g. manifold or connector).

10.1 Split Flange Clamps- ISO 6162-2 FCS, the letter M if the split flange clamp pairs are used with metric screws only, followed by a multiplication symbol (x) and the nominal size e.g. FCSx25 or FCSMx32.

EXAMPLE

A pair of carbon steel code 62 split flange clamps for either metric or inch screws and a DN 32 head is:

Split flange clamp pair, inch series ISO 6162-2 FCSx32

A pair of carbon steel code 62 split flange clamps for metric screws and a DN 25 head is:

Split flange clamp pair, metric series ISO 6162-2 FCSMx25

A pair of carbon steel code 62 split flange clamps for inch screws and a DN 25 head is:

Split flange clamp pair, inch series ISO 6162-2 FCSx25

Most split flange clamps accept both inch and metric screws and shall use FCS. Those that only accept inch screws shall use FCS and those that accept metric screws only shall use FCSM.

10.2 One-Piece Flange Clamps- ISO 6162-2 FC, the letter M if the one-piece flange clamps are used with metric screws only, followed by a multiplication symbol (x) and the nominal size e.g. FCx25 or FCMx32.

A carbon steel code 62 flange clamp for either metric or inch screws and a DN 32 head is:

Flange clamp, inch series ISO 6162-2 FCx32

A carbon steel code 62 flange clamp for metric screws and a DN 25 head is:

Flange clamp, metric series ISO 6162-2 FCMx25


A carbon steel code 62 flange clamp for inch screws and a DN 25 head is:

Flange clamp, inch series ISO 6162-2 FCx25

Most one-piece flange clamps accept both inch and metric screws and shall use FC. Those that only accept inch screws shall use FC and those that accept metric screws only shall use FCM.

10.3 Flange Ports- ISO 6162-2 P followed by the nominal size and the letter M if the flange ports use metric screws e.g. P76 or P76M.


10.4 Flange Heads- ISO 6162-2 FH, followed by a multiplication symbol (x) and the nominal size e.g. FHx76.

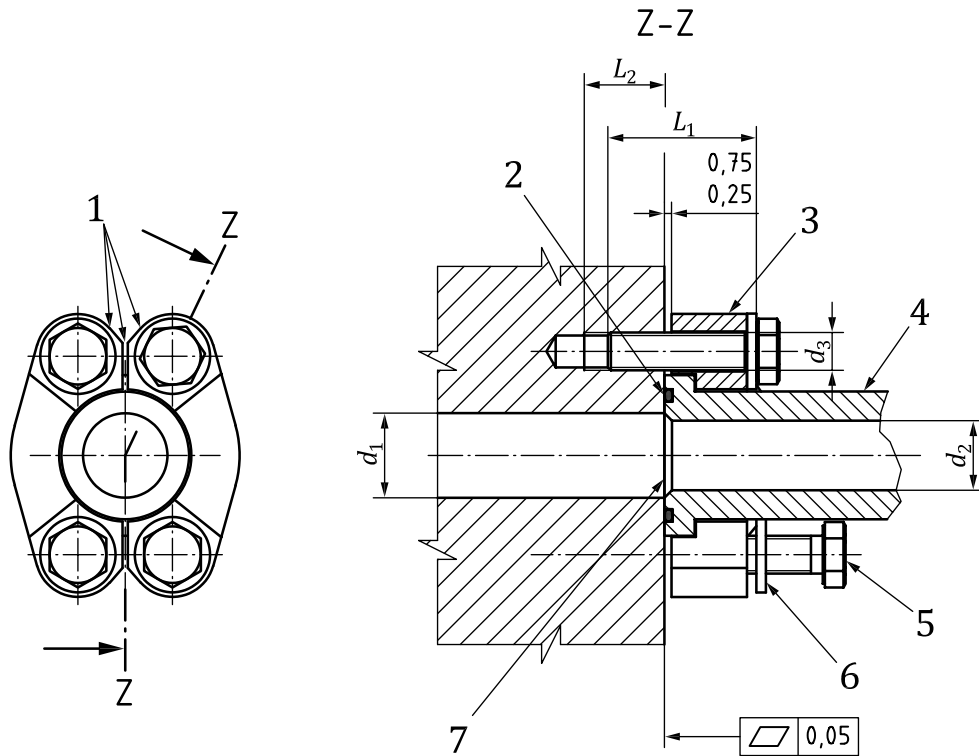

Key

- 1 shape optional
- 2 O-ring seal
- 3 split flange clamp
- 4 flanged head
- 5 screw (d_3)
- 6 hardened washer (recommended; see 4.6)
- 7 face of port on adapter, pump, etc.

Figure 1 — Assembled flange connection with split flange clamp (FCS or FCSM) (see [Tables 1](#) and [2](#))

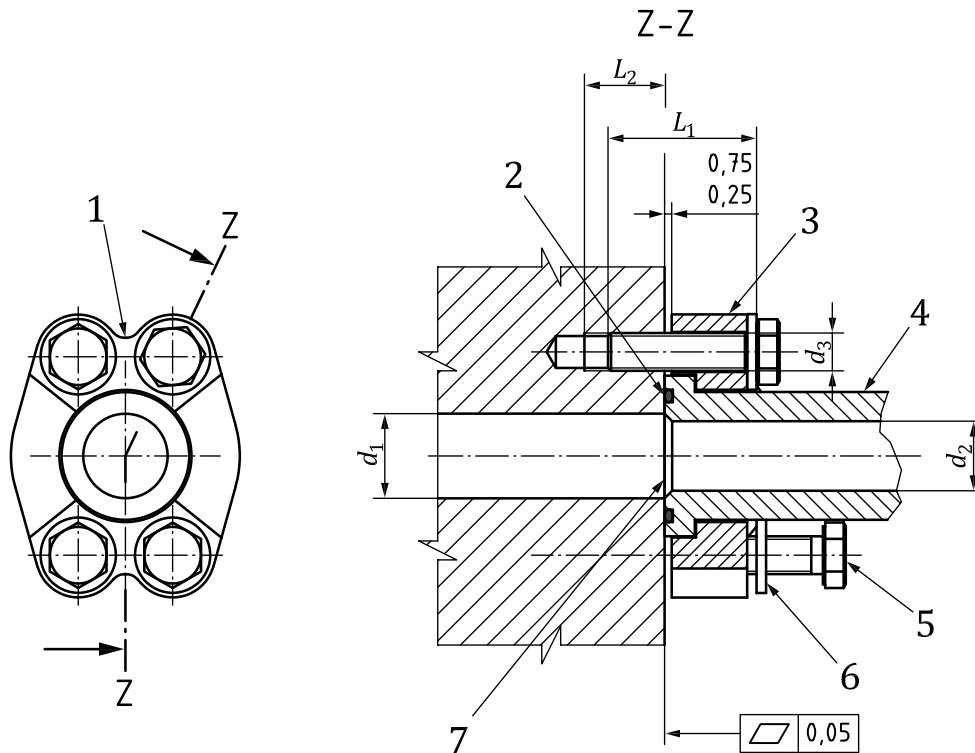

Key

- 1 shape optional
- 2 O-ring seal
- 3 one-piece flange clamp
- 4 flanged head
- 5 screw (d_3)
- 6 hardened washer (recommended; see 4.6)
- 7 face of port on adapter, pump, etc.

Figure 2 — Assembled flange connection with one-piece flange clamp (FC or FCM) (see [Tables 1](#) and [2](#))

Table 1 — Dimensions, torques and maximum working pressures for type 1 flange assemblies for use with metric screws

Dimensions in millimetres, unless noted

Nominal size DN ^a	d_1	d_2	O-ring size code ^b	Flat washer ^c (recommended)	Type 1 – metric screws of property class 10.9				Maximum working pressure MPa (bar)	Minimum burst pressure MPa (bar)
					d_3 Screw thread ^d	L_1 Screw length ^e	L_2 Min. full thread	Screw torque ^f N·m		
	+0 -1,5	max.						+10 % -0		
13	13	13	210	M8	M8	30	16	32	42 (420)	168 (1 680)
19	19,2	19,2	214	M10	M10	35	18	70	42 (420)	168 (1 680)
25	25,6	25,6	219	M12	M12	45	23	130	42 (420)	168 (1 680)
32	32	32	222	M12	M12	45	23	130	42 (420)	168 (1 680)
38	38,2	38,2	225	M16	M16	55	27	295	42 (420)	168 (1 680)
51	51	51	228	M20	M20	70	35	550	42 (420)	168 (1 680)
64	63	63,5	232	M24	M24	80	50	550	42 (420)	168 (1 680)
76	76	76,2	237	M30	M30	90	60	650	42 (420)	168 (1 680)

WARNING — It is important that all screws be lightly torqued before applying the final recommended torque values to avoid breaking the split flange clamps or one-piece flange clamps during installation (see Annex A for assembly guidelines).

^a See definition in ISO 5598.

^b O-ring size code in accordance with ISO 3601-1; see Annex B for reference dimensions.

^c ANSI/ASME B18.22.1 Type B narrow washers of HV 300 quality material sized for the corresponding inch screw specified in Table 2 may be substituted for all but the DN 25 size, where a 7/16 washer in accordance with ANSI/ASME B18.22.1 can cause interference.

^d Coarse pitch thread in accordance with ISO 261 and ISO 724.

^e Screw lengths are calculated for steel; use of other materials can require different screw lengths.

^f These torque values are only a guide when using lubricated screws, calculated with a coefficient of friction of 0,17. Net tightening torque depends on many factors, including lubrication, coating and surface finish.

Table 2 — Dimensions, torques and maximum working pressures for type 2 flange assemblies for use with inch screws (not to be used for new designs – see 5.4)

Dimensions in millimetres, unless otherwise noted

Nominal size DN ^a	d_1	d_2	O-ring size code ^b	Flat washer ^c (recommended)	Type 2 – inch screws of grade 8 in accordance with SAE J429				Maximum working pressure MPa (bar)	Minimum burst pressure MPa (bar)
					d_3 Screw thread ^d	L_1 Screw length ^e	L_2 Min. full thread	Screw torque ^f N·m		
	+0 -1,5	max.			UNC	nom.		+10 % 0		
13	13	13	210	M8	5/16-18	32	21	32	42 (420)	168 (1 680)
19	19,2	19,2	214	M10	3/8-16	38	24	60	42 (420)	168 (1 680)
25	25,6	25,6	219	7/16	7/16-14	44	27	92	42 (420)	168 (1 680)
32	32	32	222	M12	1/2-13	44	25	150	42 (420)	168 (1 680)
38	38,2	38,2	225	M16	5/8-11	57	35	295	42 (420)	168 (1 680)
51	51	51	228	M20	3/4-10	70	38	450	42 (420)	168 (1 680)

WARNING — It is important that all screws be lightly torqued before applying the final recommended torque values to avoid breaking the split flange clamps or one-piece flange clamps during installation (see Annex A for assembly guidelines).

^a See definition in ISO 5598.


^b O-ring size code in accordance with ISO 3601-1; see Annex B for reference dimensions.

^c ANSI/ASME B18.22.1 Type B narrow washers of HV 300 quality material for the corresponding screw size in this table may be substituted for all sizes except for DN 25, where a washer conforming to ISO 7089 might cause interference.

^d Coarse pitch thread in accordance with ISO 263 and ISO 725 (UNC-2A for screw threads, UNC-2B for port threads).

^e Screw lengths are calculated for steel; use of other materials can require different screw lengths.


^f These torque values are only a guide when using lubricated screws, calculated with a coefficient of friction of 0,17. Net tightening torque depends on many factors, including lubrication, coating and surface finish.

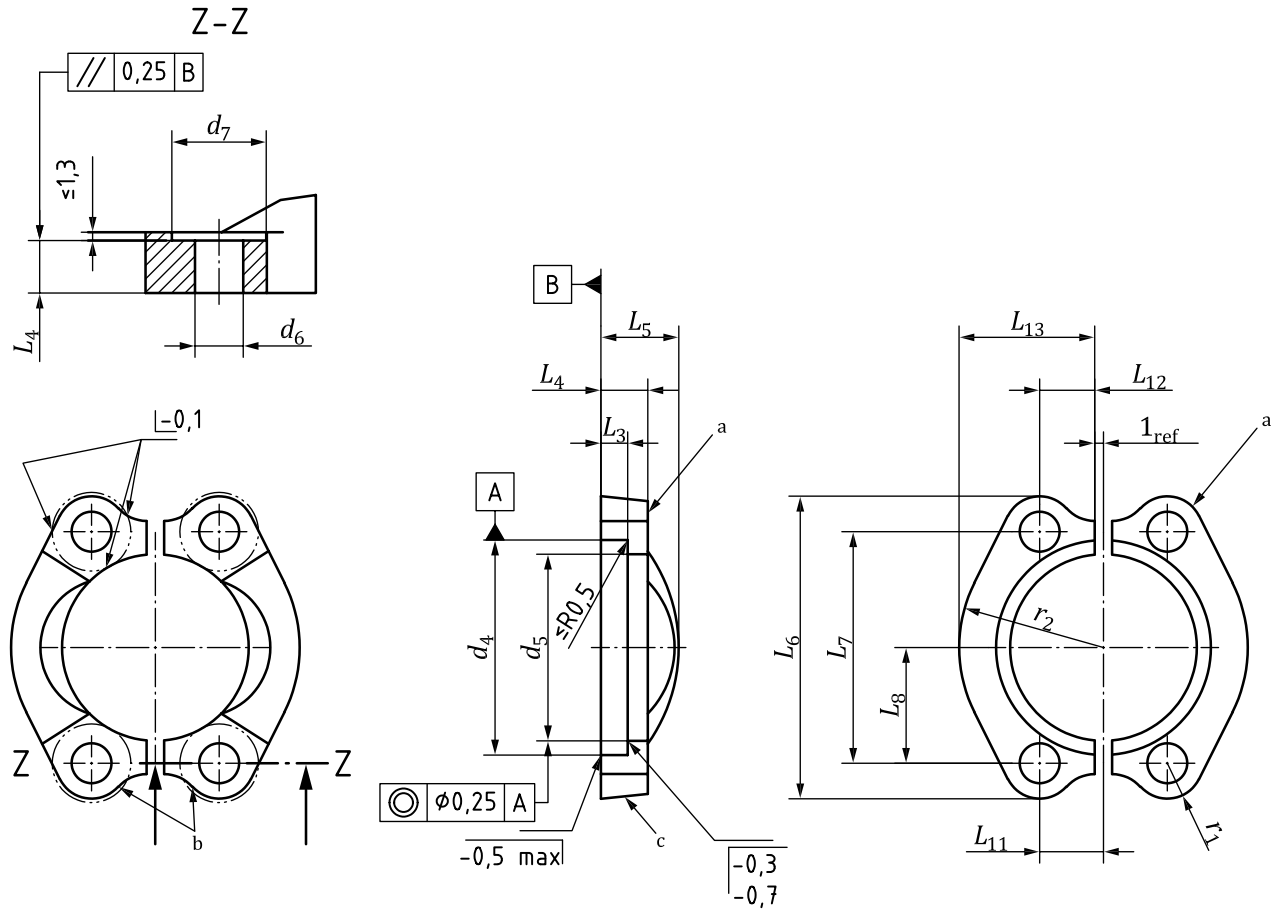

Key

- a Parts for use with metric screws only (Type 1 size DN25) require an M. For alternative marking see [Clause 9.2](#).
- b Shape optional.
- c Draft angle of 6° maximum; see [Clause 6.2](#).

Figure 3 — Split flange clamp (FCS or FCSM) (see [Table 3](#))

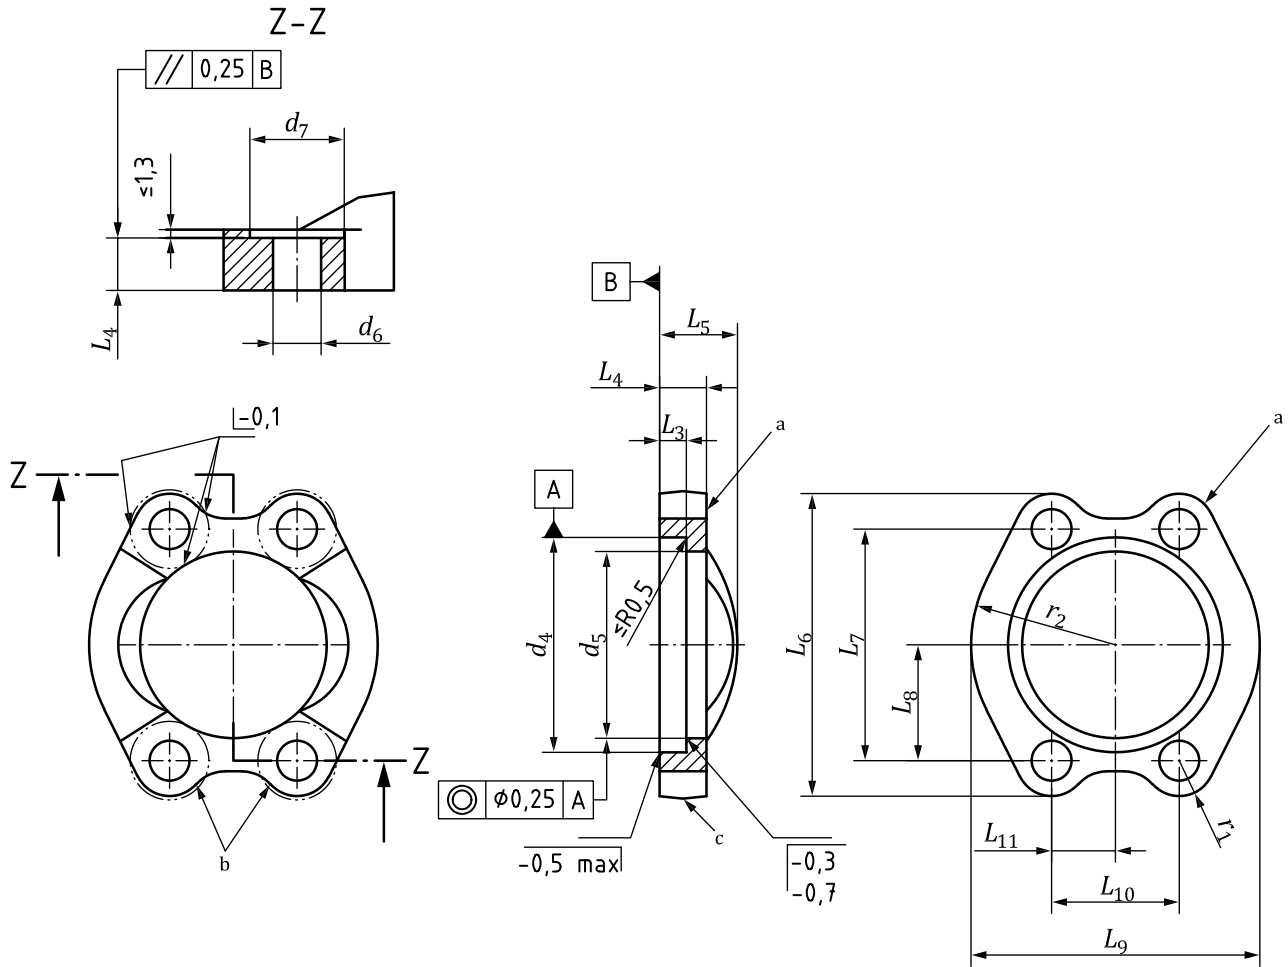

Key

- a Parts for use with metric screws only (Type 1 size DN25) require an M. For alternative marking see [Clause 9.2](#).
- b Shape optional.
- c Draft angle of 6° maximum; see [Clause 6.2](#).


Figure 4 — One-piece flange clamp (FC or FCM) (see [Table 3](#))

Table 3 — Dimensions of split and one-piece flange clamps

Dimensions in millimetres

Nominal size DN	d_4	d_5	d_6	d_7	L_3	L_4	L_5	L_6	
	$\pm 0,25$	$\pm 0,25$	$\pm 0,15$	min	$\pm 0,15$	$\pm 0,5$	$\pm 0,8$	max	min
13	32,5	24,65	8,9	16,5	7,2	15,7	22,5	57,2	55,6
19	42	32,5	10,6	20,5	8,2	19,1	28,5	72,1	70,6
25	48,4	38,85	13,3 ^a	26	9	23,9	33,5	81,8	80,3
32	54,75	44,45	13,3	26	9,8	26,9	38	96	94,5
38	64,25	51,55	16,7	32,5	12,1	30,2	43	114,3	111,3
51	80,15	67,55	20,6	38	12,1	36,6	52,5	134,9	131,8
64	108,5	89,5	25	45	20	48	—	176,9	174,8
76	132,5	114,5	31	57	25	58	—	216	208
Nominal size DN	L_7	L_8	L_9	L_{10}	L_{11}	L_{12}	L_{13}	r_1	r_2
	$\pm 0,25$	$\pm 0,25$	$\pm 0,8$	$\pm 0,25$	$\pm 0,25$	$\pm 0,4$	$\pm 0,8$	ref	ref
13	40,5	20,25	47,8	18,2	9,1	8,1	22,6	8	24
19	50,8	25,4	60,5	23,8	11,9	10,9	29	10,5	30
25	57,2	28,6	69,9	27,8	13,9	13	33,8	12	35
32	66,7	33,35	77,7	31,8	15,9	15	37,6	14	39
38	79,4	39,7	95,3	36,5	18,25	17,3	46,5	17	48,5
51	96,8	48,4	114,3	44,5	22,25	21,3	55,9	18	57
64	123,8	61,9	150	58,7	29,35	28,4	74	26	75
76	152,4	76,2	176	71,4	35,7	34,7	88	29	89

^a For type 2 (inch), use $(12 \pm 0,25)$ mm.

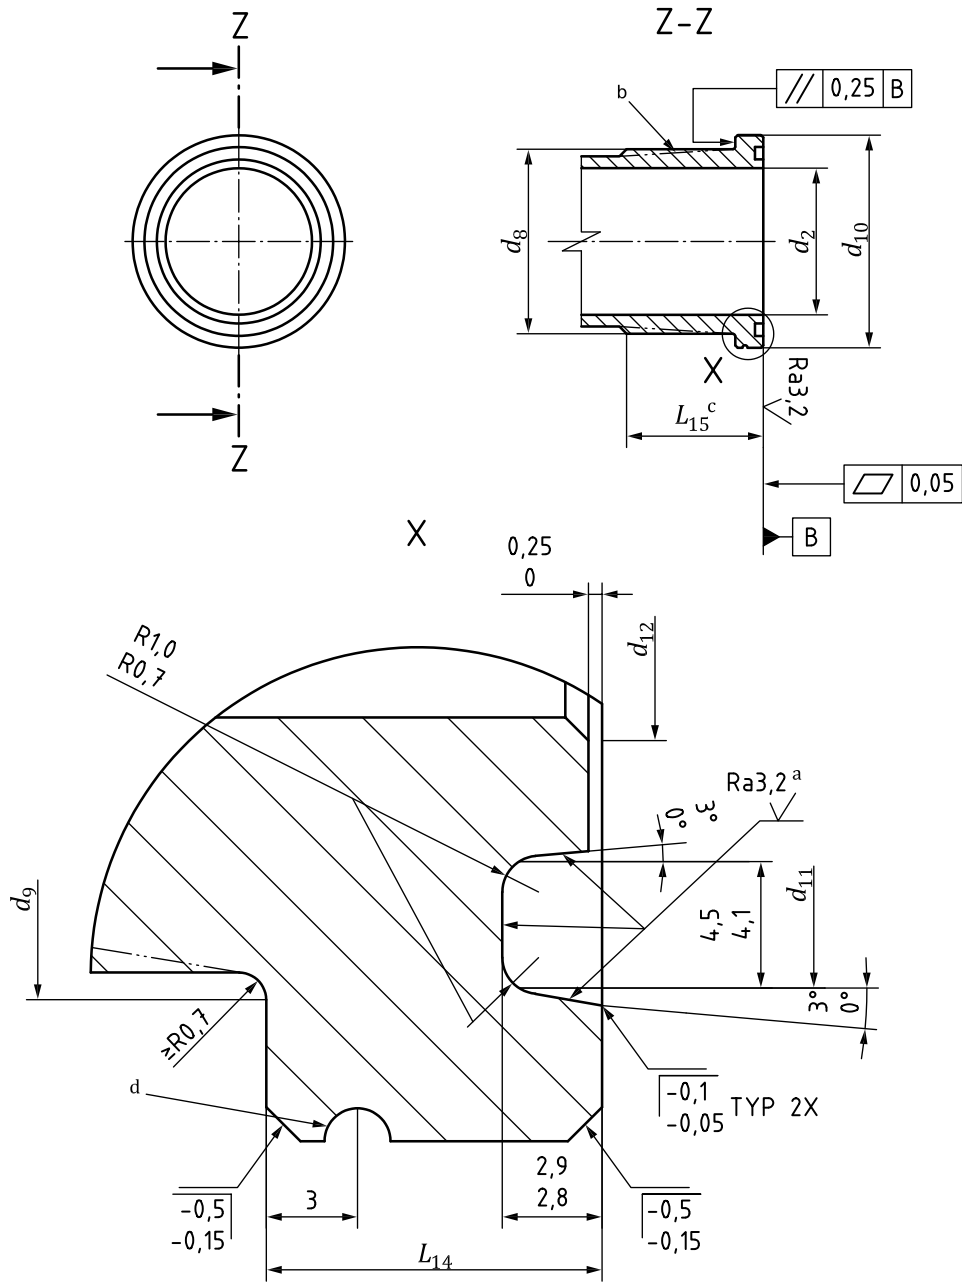

Key

- a Smooth sealing surface required, see 7.7.
- b Optional contour.
- c Connector design beyond L_{15} length is optional providing adequate clearance for installing screws is maintained.
- d An identification groove,(see 9.1 b).


Figure 5 — Flanged head (see Table 4)

Table 4 — Dimensions of flanged heads

Dimensions in millimetres

Nominal size DN	d_2	d_8	d_9	d_{10}	d_{11}		d_{12}	L_{14}	L_{15}
	max.	max.	max.	$\pm 0,25$	max.	min.	max.	$\pm 0,15$	ref.
13	13	23,9	25,3	31,75	25,53	25,4	14,2	7,8	14
19	19,2	31,8	33,2	41,3	31,88	31,75	21	8,8	18
25	25,6	38,1	39,5	47,65	39,75	39,62	27	9,5	21
32	32	43,7	45,1	54	44,58	44,45	33,3	10,3	25
38	38,2	50,8	52,2	63,5	53,98	53,72	39,6	12,6	30
51	51	66,5	67,9	79,4	63,50	63,25	52,3	12,6	38
64	63,5	89	90,4	107,7	76,35	76,05	65	20,5	50
76	76,2	113,5	114,9	131,7	92,1	91,8	80	26	65

WARNING — The flanged head material and wall thickness depend on the selected working pressure and the d_8 diameter.

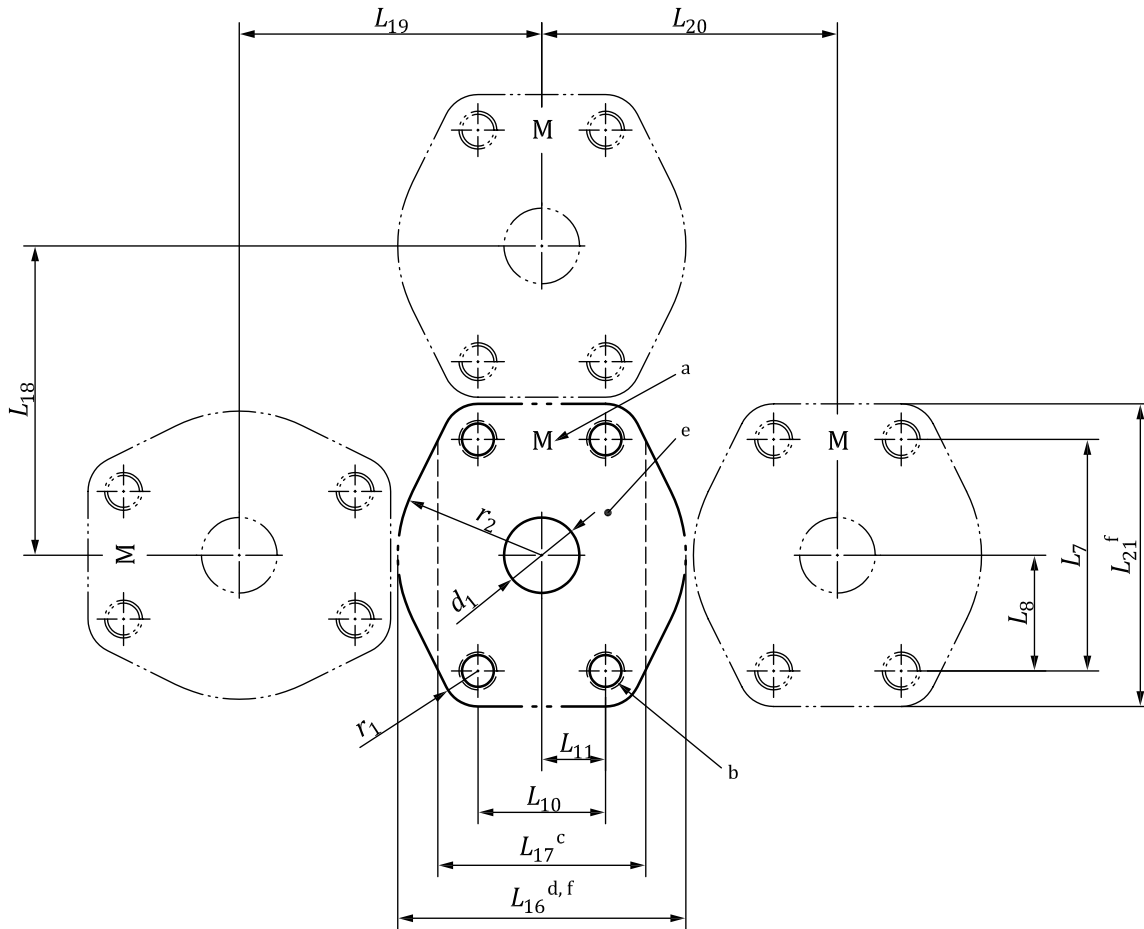

Key

- a Letter M to indicate metric type 1 port – raised surface not allowed.
- b Four threaded holes of diameter d_3 on the port with full thread length L_2 perpendicular to the surface within 0,25.
- c Minimum flange pad width.
- d Recommended flange pad width.
- e Maximum surface roughness of port face is ISO 1302-MRR Ramax 3,2.
- f Projections within this area can cause interferences.

Figure 6 — Port dimensions for flange connections and minimum and recommended flange pad widths (see Table 5)

Table 5 — Dimensions of flange ports and flange pad widths

Dimensions in millimetres

Nominal size DN	d_1	r_1	r_2	d_3	L_2	L_7	L_8	L_{10}	L_{11}	L_{16}	L_{17}	L_{18}	L_{19}	L_{20}	L_{21}	
	+0 -1,5	ref	ref			±0,25	±0,25	±0,25	±0,25	ref.	min	min	min	min	min	
13	13	8	24	See Table 1 (type 1) or Table 2 (type 2)		40,5	20,25	18,2	9,1	52	38	61	57	53	60	
19	19,2	10,5	30			50,8	25,4	23,8	11,9	64	47	76	70	65	75	
25	25,6	12	35			57,2	28,6	27,8	13,9	74	53	86	80	75	85	
32	32	14	39			66,7	33,35	31,8	15,9	82	60	100	91	83	99	
38	38,2	17	48,5			79,4	39,7	36,5	18,25	99	69	118	109	100	117	
51	51	18	57			96,8	48,4	44,5	22,25	118	85	139	129	119	138	
64	63	26	75			123,8	61,9	58,7	29,35	150,8	113	183	169	156	180	
76	76	29	89			152,4	76,2	71,4	35,7	178,8	132	218	202	184	219	

WARNING — Users of this document should ensure that suitable material is chosen for the port to maintain the required working pressure, if carbon steel is not used.

Annex A (informative)

Recommended assembly procedures and screw torque levels for flange connections conforming to ISO 6162-2

A.1 Ensure that the flange connection selected meets the requirements of the application (e.g. rated pressure).

A.2 Ensure that the flange components and ports conform to ISO 6162-2 and that the correct screws (metric for type 1 and inch for type 2) are used.

NOTE Flange connections conforming to ISO 6162-1 have a lower rated pressure than that of flange connections that conform to this document. The pressure rating of the flange assembly depends on the use of the correct grade of screw. The two styles are differentiated by different hole patterns, and flanged heads that conform to this document have an identification groove [see 9.1 b) NOTE]; components conforming to one part of ISO 6162 cannot be intermixed with components conforming to the other.

A.3 Ensure that all sealing and surface interfaces are free of burrs, nicks, scratches and any foreign material.

A.4 To help minimize O-ring scrub-out, lubricate the O-ring with a light coat of the hydraulic fluid used in the system or a compatible oil, when necessary. Take special care, as excess lubricant can seep out of the joint and lead to a false indication of leakage.

A.5 Position the flanged head and the flange clamps.

A.6 Place the hardened washers on the screws, and place the screws through the holes in the clamps.

A.7 Hand tighten the screws in the sequence shown in [Figure A.1](#) to ensure uniform contact at all four screw locations to prevent the flange tipping, which can lead to the flange breaking during application of final torque.




Figure A.1 — Screw tightening sequence

A.8 Torque the screws in the sequence shown in [Figure A.1](#) in two or more increments to the recommended screw torque level selected from [Table 1](#) or [2](#) and using the relevant wrench sizes in [Table A.1](#).

Table A.1 — Wrench sizes for assembling flange connections that conform to ISO 6162-2

Nominal size	Maximum working pressure	Type 1 (metric)			Type 2 (inch)		
		Thread	Wrench		Thread	Wrench	
			for hexagon head screw	for socket head screw		for hexagon head screw	for socket head screw
	MPa (bar)		mm	mm		in	in
13	42 (420)	M8	13	6	5/16-18	1/2	1/4
19	42 (420)	M10	16	8	3/8-16	9/16	5/16
25	42 (420)	M12	18	10	7/16-14	5/8	3/8
32	42 (420)	M12	18	10	1/2-13	3/4	3/8
38	42 (420)	M16	24	14	5/8-11	15/16	1/2
51	42 (420)	M20	30	17	3/4-10	1 1/8	5/8
64	42 (420)	M24	36	19	—	—	—
76	42 (420)	M30	46	22	—	—	—

Annex B (informative)

O-ring designation codes and dimensions

Table B.1 — Designation codes and dimensions of O-rings used in ISO 6162-2 (for reference only)

ISO 3601-1 size code	ISO 3601-1 designation code	Inside diameter	Cross- section
		mm	mm
210	O-ring-ISO 3601-1-210A-18,64 × 3,53-N	18,64	3,53
214	O-ring-ISO 3601-1-214A-24,99 × 3,53-N	24,99	
219	O-ring-ISO 3601-1-219A-32,92 × 3,53-N	32,92	
222	O-ring-ISO 3601-1-222A-37,69 × 3,53-N	37,69	
225	O-ring-ISO 3601-1-225A-47,22 × 3,53-N	47,22	
228	O-ring-ISO 3601-1-228A-56,74 × 3,53-N	56,74	
232	O-ring-ISO 3601-1-232A-69,44 × 3,53-N	69,44	
237	O-ring-ISO 3601-1-237A-85,32 × 3,53-N	85,32	

Bibliography

- [1] ISO 68-1, *ISO general purpose screw threads — Basic profile — Part 1: Metric screw threads*
- [2] ISO 68-2, *ISO general-purpose screw threads — Basic profile — Part 2: Inch screw threads*
- [3] ISO 273, *Fasteners — Clearance holes for bolts and screws*
- [4] ISO 1101, *Technical drawings — Geometrical tolerancing — Tolerancing of form, orientation, location and run-out — Generalities, definitions, symbols, indications on drawings*
- [5] ISO 5864, *ISO inch screw threads — Allowances and tolerances*
- [6] ISO 6164, *Hydraulic fluid power — Four-screw, one piece square-flange connections for use at pressures of 25 MPa and 40 MPa (250 bar and 400 bar)*
- [7] ISO 6708, *Pipework components — Definition and selection of DN (nominal size)*
- [8] ISO 6892 (all parts), *Metallic materials — Tensile testing*
- [9] ISO 10763, *Hydraulic fluid power — Plain-end, seamless and welded precision steel tubes — Dimensions and nominal working pressures*
- [10] ISO 12151-3, *Connections for hydraulic fluid power and general use — Hose fittings — Part 3: Hose fittings with ISO 6162-1 or ISO 6162-2 flange ends*
- [11] ISO 13715, *Technical drawings — Edges of undefined shape — Vocabulary and indications*
- [12] ISO 80000-1, *Quantities and units — Part 1: General*
- [13] SAE J515, *Specification for O-ring Materials Used with Hydraulic Connectors*
- [14] ANSI/ASME B18.22.1, *Washers: Helical Spring-Lock, Tooth Lock, and Plain Washers (Inch Series)*

